






Product Data Sheet

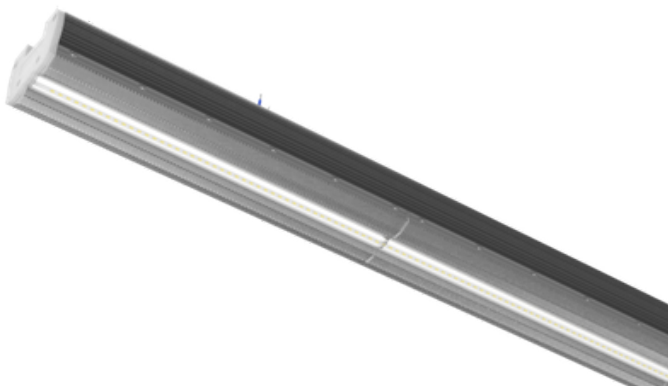

DIMENSION

Unit: mm

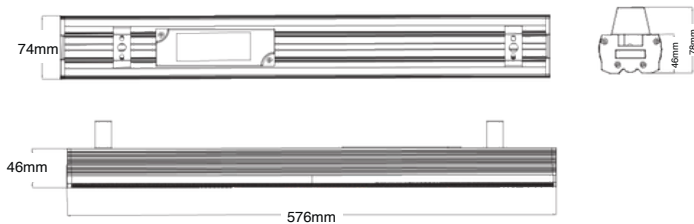

Easy & Quick Connection

Code:	LINKIT-60-24W-CCT
LED Type:	SMD 2835
LED Power:	Optional 15W - 19W- 24W
Luminous Flux:	2250 - 2850 - 3600lm
CRI:	>80
CCT:	3000K - 4000K - 6000K
Beam Angle:	110 °
Power Factor:	0.9
Surge protection:	1KV-Line-Line 1KV-Line-Earth
Voltage:	AC100-277V / 50/60Hz
Installation Height:	2-5M
Housing:	Aluminum/RAL 9017 black
Optic:	Polycarbonate (with integrated lenses)
Housing Finish:	Electro powder coating
IP Grade:	IP20
Operating Temperature:	-0°C to + 30°C
Operating Humidity:	10-90%RH
Mounting Option:	Ceiling&pendant mounting
Net Weight:	0.98KG